



Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1400	RPM
Power consumption	P _e	280	W
Nominal current	I	1.4	A
Maximum current	I	1.7	A
Capacitor		08/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Weight		12.4	kg
Packing dimensions		635x635x360	mm

Fan details

Impeller blades	3
Impeller type	3
Impeller system	C
Impeller material	PP


Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

Characteristics

0 Pa	7050 m ³ /h
------	------------------------



Please note: Picture may deviate from original product


Approval(s)




No.

Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

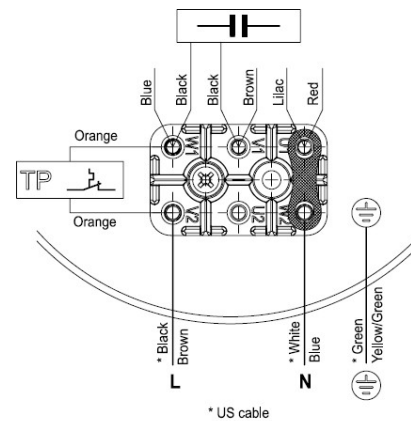

Dimensions

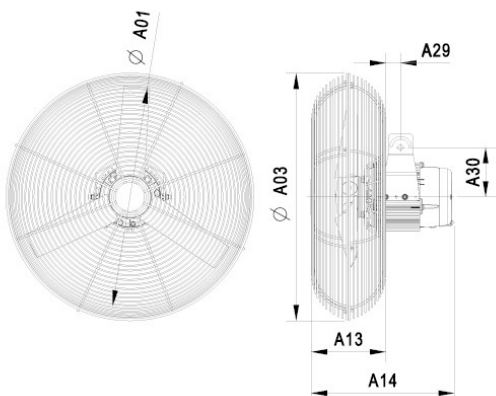

A01:	512 mm
A03:	575 mm
A13:	174 mm
A14:	332 mm
A29:	34 mm
A30:	115 mm