



Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		905	RPM
Power consumption	P _e	420	W
Nominal current	I	2.1	A
Maximum current	I	2.9	A
Capacitor		10/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Weight		17.6	kg
Packing dimensions		720x720x400	mm

Fan details

Impeller blades	3
Impeller type	5
Impeller system	G
Impeller material	PG


Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

Characteristics

0 Pa	9350 m ³ /h
------	------------------------




Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

AA11 - 1 Phase - Dual-voltage standard - High Voltage - CCW

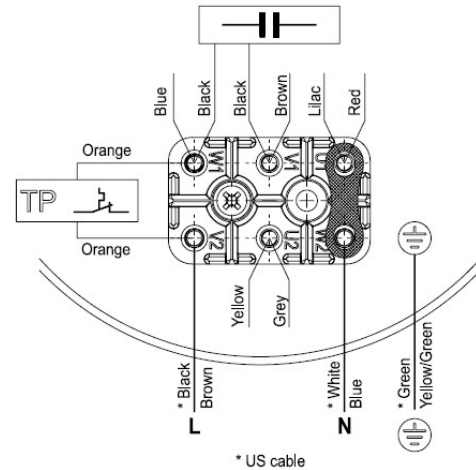

Dimensions

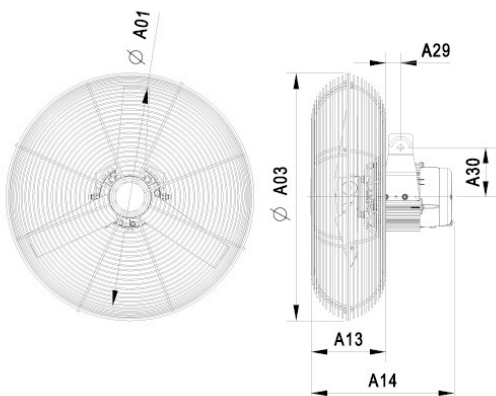

A01:	610 mm
A03:	683 mm
A13:	206 mm
A14:	350 mm
A29:	32 mm
A30:	115 mm